

**UNIVERSITY COLLEGE TATI (UC TATI)****FINAL EXAMINATION QUESTION BOOKLET**

COURSE CODE	: DND 2054
COURSE	: ULTRASONIC TESTING I
SEMESTER/SESSION	: 2-2024/2025
DURATION	: 3 HOURS

Instructions:

1. This booklet contains **4** questions. Answer **All** questions.
2. All answers should be written in answer booklet.
3. Write legibly and draw sketches wherever required.
4. If in doubt, raise your hands and ask the invigilator.

DO NOT OPEN THIS BOOKLET UNTIL YOU ARE TOLD TO DO SO

THIS BOOKLET CONTAINS 6 PRINTED PAGES INCLUDING COVER PAGE

ULTRASONIC TESTING I (DND 2054)

QUESTION 1

a) Define the definition of the following:

- i. Wavelength (3 marks)
- ii. Frequency (3 marks)

b) Decibel (dB) can be measured by comparing signal heights on a calibrated screen. Calculate and complete table 1 below. (6 marks)

Table 1

dB	H1 (%)	H2 (%)	Drop / Increase (%)
-20	100		
-14	100		
-6	80		

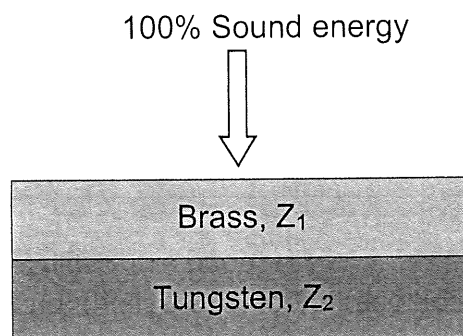
c) 50 mm Aluminium Block was prepared to be tested with Ultrasonic Testing. The details of compression waves probe used to inspect the Aluminium block as per table 2 below. Calculate the followings:

Table 2

Probe Diameter	Probe Frequency
10 mm of diameter	2.5 MHz

- i. Fresnel zone of ultrasonic beam. (4 marks)
- ii. Fraunhofer zone (half angle) of ultrasonic beam at 10% of sound intensity. (5 marks)

d) Acoustic impedance (Z) is the resistance of a material to the passage of ultrasound. Figure 1 shows the test sample. Calculate the followings percentage of sound energy reflected and transmitted at Brass (Z_1) to Tungsten (Z_2) interface. (4 marks)

**Figure 1**

ULTRASONIC TESTING I (DND 2054)

QUESTION 2

- a) The crystals used in ultrasonic testing are X-cut to produce compression wave sound. State **three (3)** types of crystal material used in Ultrasonic probe. (3 marks)
- b) Snell's law is taken from the laws of optics or light. A change of velocity from one medium to another medium is required to allow refraction to occur. Calculate the followings:
- i. The refracted angle of compression wave, β in Nickel, if the incident angle, α in Lead is 12° . (3 marks)
 - ii. The incident angle, α in Perspex, if the refracted angle of shear wave, β in Aluminium is 45° . (3 marks)
- c) Calculate the incident angle, α of 1st critical angle and 2nd critical angle for Perspex as a medium 1 to Stainless Steel as a medium 2. (4 marks)
- d) Illustrate the defect signal and their location in weld area for the following defects:
- i. Toe Crack (3 marks)
 - ii. Internal Porosity (3 marks)
 - iii. Slag inclusion (3 marks)
 - iv. Lack of root fusion (3 marks)

ULTRASONIC TESTING I (DND 2054)

QUESTION 3

- a) Shear waves or angle probes can only propagate in solids, rigid particle bonding being a pre-requisite.
- State **three (3)** methods for setting test sensitivity for angle probe. (3 marks)
 - List **three (3)** methods for sizing techniques used with shear wave probes. (3 marks)
 - Define **three (3)** types of reference reflectors used in UT calibration block. (3 marks)
- b) Skip factors are used for projecting defect depths and positions in relation to the probe index by applying the beam path and surface distance on the test surface. 20 mm single vee butt weld plate is prepared to be tested by 60° ultrasonic probe.
- Construct the trigonometry by using probe angle, beam path and material thickness. (3 marks)
 - Calculate the half skip surface distance. (3 marks)
 - Calculate the half skip beam path. (3 marks)
- c) A 4 MHz, 8x9 mm probe size, 45° angle beam probe is used for testing a 30 mm thickness of Single Vee Carbon steel plate joint. A defect indication is obtained at a beam path of 59.4 mm, near sidewall area by using a lateral scanning. The signal for this defect is very clean signal with high amplitude response and fall quickly on swivel and orbital scanning.
- State the name of defect found for the given details above. (1 mark)
 - Calculate the surface distance of defect from the probe index to the center of the weld. (2 marks)
 - Calculate the depth of defect from the top scanning surface. (4 marks)

ULTRASONIC TESTING I (DND 2054)

QUESTION 4

- a) State **four (4)** types of calibration blocks used in Ultrasonic testing. (4 marks)
- b) Double crystal probe consists of two different crystal elements, which are Barium Titanate and Lithium Sulphate that mounted side by side.
- i. List **main** advantage of Barium Titanate and Lithium Sulphate material. (4 marks)
 - ii. Explain **three (3)** advantages of double crystal probe. (5 marks)
- c) Explain the properties of ultrasonic probes in terms of beam spread, attenuation and penetration for the following effects:
- i. High frequency. (3 marks)
 - ii. Large diameter. (3 marks)
- d) Describe the characteristics of particles movement, sound waves propagation and sound velocity for the following sound below:
- i. Compression waves (3 marks)
 - ii. Shear waves (3 marks)

-----End of questions-----

ULTRASONIC TESTING I (DND 2054)

ATTACHMENT 1

Table 3

Medium	Compression Velocity (m/s)	Shear Velocity (m/s)	Acoustic Impedance, Z
Air	330	-	0
Aluminium	6400	3130	17.2
Brass	4370	2100	37
Barium Titanate	5260	-	30
Cast iron	3500	2200	25
Copper	4760	2330	42.5
Gold	3240	1200	63
Molybdenum	6250	3350	63.7
Oil	1440	-	1.3
Lead	2160	700	24.6
Perspex	2740	1320	3.2
Carbon steel	5960	3240	46.5
Stainless steel	5740	3130	44.8
Silver	3700	1700	36.9
Iron	5960	3220	46.8
Tin	3380	1610	24.7
Tungsten	5170	2880	100
Lithium Sulphate	5450	-	11.2
Beryllium	1289	888	23.2
Water	1480	-	1.48
Zinc	4170	2480	29.6
Platinum	3960	1670	85
Magnesium	5790	3100	10.1
Nickel	5480	2990	48.5
Glass	5770	-	14.5
Uranium	3370	2020	63
Titanium	6100	3120	18
Rubber	1600	-	-

$$\text{Near Zone} = \frac{D^2}{4\lambda}$$

$$\frac{\sin \alpha}{\sin \beta} = \frac{V_1}{V_2}$$

$$F_f = \frac{V}{2t}$$

$$\text{dB} = 20 \log_{10} H_2/H_1$$

$$\left(\frac{Z_1 - Z_2}{Z_1 + Z_2} \right)^2 \times 100 = \% \text{ reflected energy}$$

$$\sin \frac{\theta}{2} = \frac{k\lambda}{D}$$

$$k: 0\% = 1.22 \quad 50\% = 0.56$$

$$10\% = 1.08$$

----- End of attachment -----